




## **Magnetic Separator:**

The permanent magnetic roller separator can be used to separate the wet magnetism particles or eliminate the waste magnetism from non-magnetic mineral. The magnetic separator is widely used to beneficiate the magnetite. The permanent magnetic roller separators with different strong magnetism intensity is available from us

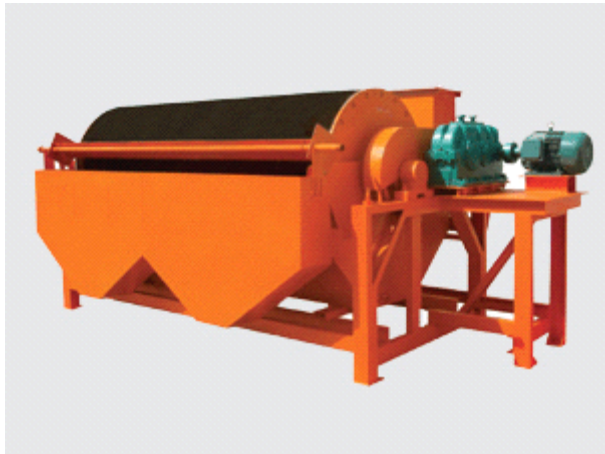

## **The main technical parameters of permanent magnetic roller separator:**

Model (m)	Capacity (t/h)	Power ( kw)	Weight (T)
CTBΦ600×600	5-10	Y1.1-4	0.85
CTBΦ600×900	8-15	Y1.1-4	0.91
CTBΦ600×1200	10-20	Y2.2-4	1.13
CTBΦ600×1800	15-30	Y2.2-4	1.34
CTBΦ750×1200	12-25	Y3-4	1.49
CTBΦ750×1800	30-45	Y3-4	2.05
CTBΦ900×1800	35-60	Y4-4	3.0
CTBΦ1050×1800	40-75	Y4.5-4	4.2